


**RP GEARBOXES**

**BASIC SPECIFICATIONS**

- Power Ratings from 0.25 to 2HP
- Output Torque to 310 in-lbs
- 4.71:1 and 7:1 ratio available
- Single or double hole shafts

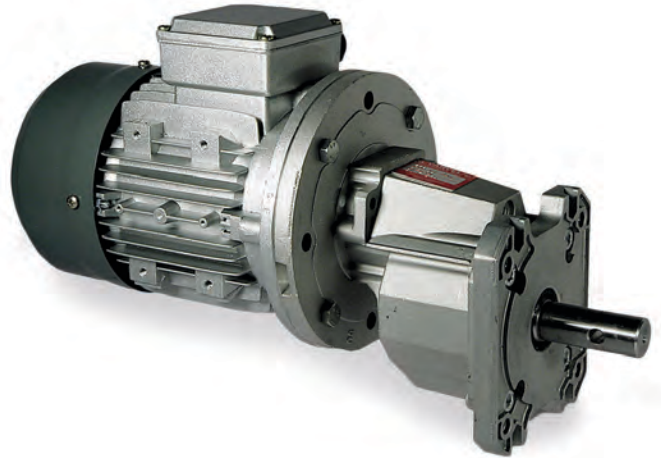

**APPLICATIONS**

- Animal livestock systems and auger feeders; driving (screw conveyors) in-floor feeding applications.

**STANDARD FEATURES**

- Vent free design, factory lubricated with premium synthetic long life gear lubricant with an operating temperature range of -4°F to 131°F (-20°C to 55°C)
- Multiple mounting positions specifically designed for auger feeding systems
- Unparalleled flexibility: housings accept both NEMA 56C and IEC input flanges, no auger adapter flange required

MODEL	Part Number	List	Ratio	RPM	Shaft Holes	Available Input Flanges	
						NEMA	IEC (B5/B14)
RP90	FRP-G 90 SQ/1 1:4.73 N56	\$319	4.71	370	1	56Y/56C	71/80/90
RP90	FRP-G 90 SQ/1 1:4.73 N56 - SP	\$319	4.73	370	2	56Y/56C	71/80/90

