




Model BMB.754D-C
MFG PN: T56 3/4U4B

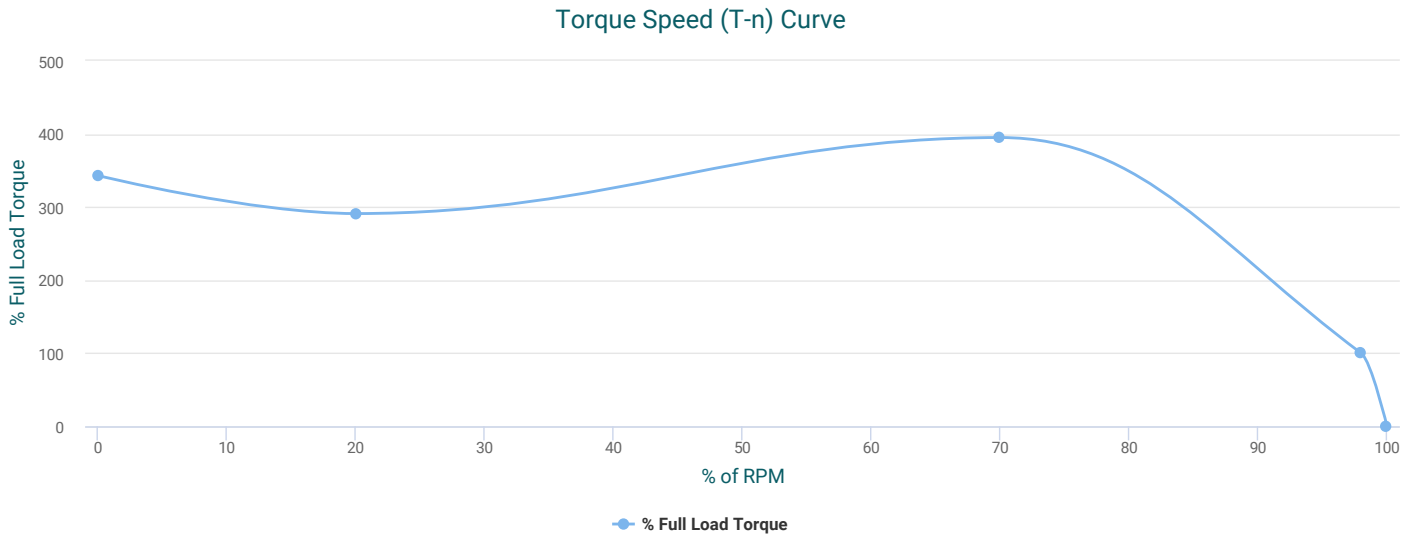

Highcharts.com

PERFORMANCE LOAD VALUES, HIGH VOLTAGE, 60Hz

TYPICAL PERFORMANCE - NOT GUARANTEED VALUES

TORQUE VALUES	TORQUE (lb-ft)	TORQUE (% FULL LOAD)	PERFORMANCE VALUES	
Locked Rotor Torque	7.7	343	Start Configuration	D0L
Pull-Up Torque	6.5	291	Starting Current (A)	8.65
Breakdown Torque	8.9	395	No-Load Current (A)	1
Full Load Torque	2.3	100	No-Load Power Factor	-

% OF RATED LOAD	25	50	75	100	125	S.F. 1.25
Line Amperes (A)	1	1	1.1	1.3	1.4	1.4
Efficiency (%)	62.8	75.7	80.2	81.8	82	82
Speed (r/min)	1787	1776	1763	1749	1734	1734
Power Factor (cosΦ)	0.28	0.44	0.57	0.67	0.74	0.74
Input Power (kW)	0.22	0.37	0.52	0.68	0.85	0.85

Questions? Call 1.888.286.1820