




**Model JMC0256DP**  
 MFG PN: TXC324T25U6B-A

**Torque Speed (T-n) Curve**

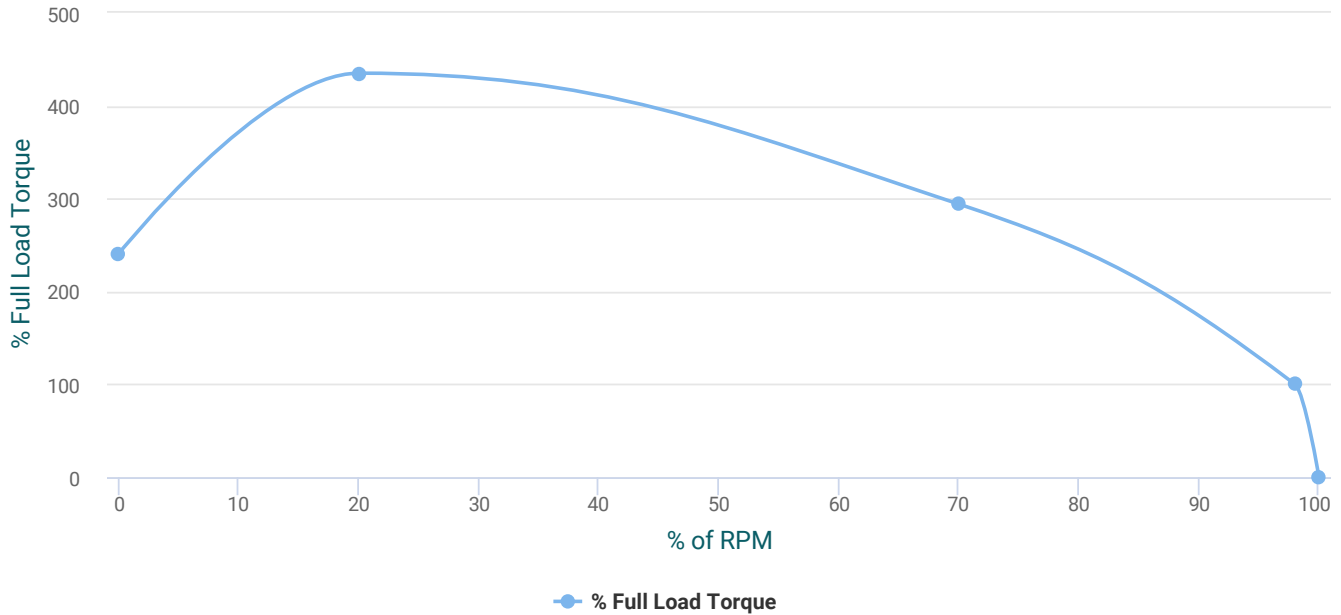

**PERFORMANCE LOAD VALUES, HIGH VOLTAGE, 60Hz**

**TYPICAL PERFORMANCE - NOT GUARANTEED VALUES**

TORQUE VALUES	TORQUE (lb-ft)	TORQUE (% FULL LOAD)	PERFORMANCE VALUES	
Locked Rotor Torque	374.193305689	241	Start Configuration	DOL
Pull-Up Torque	218.094914854	435	Starting Current (A)	266.1
Breakdown Torque	464.973930147	294	No-Load Current (A)	11.86
Full Load Torque	110.708078606	100	No-Load Power Factor	0.057

% OF RATED LOAD	25	50	75	100	125	S.F. 1.25
Line Amperes (A)	13.539	17.962	23.483	29.908	37.046	37.046
Efficiency (%)	-	92.086	92.506	91.989	91.036	91.036
Speed (r/min)	1195.7	1191.7	1187.3	1182.5	1177.2	1177.2
Power Factor (cosΦ)	0.484	0.701	0.801	0.843	0.86	0.86
Input Power (kW)	5.226	10.045	14.999	20.111	25.402	25.402

**Questions? Call 1.888.286.1820**