




**Model JPA0036DP**  
 MFG PN: TXA213T3U6B

**Torque Speed (T-n) Curve**

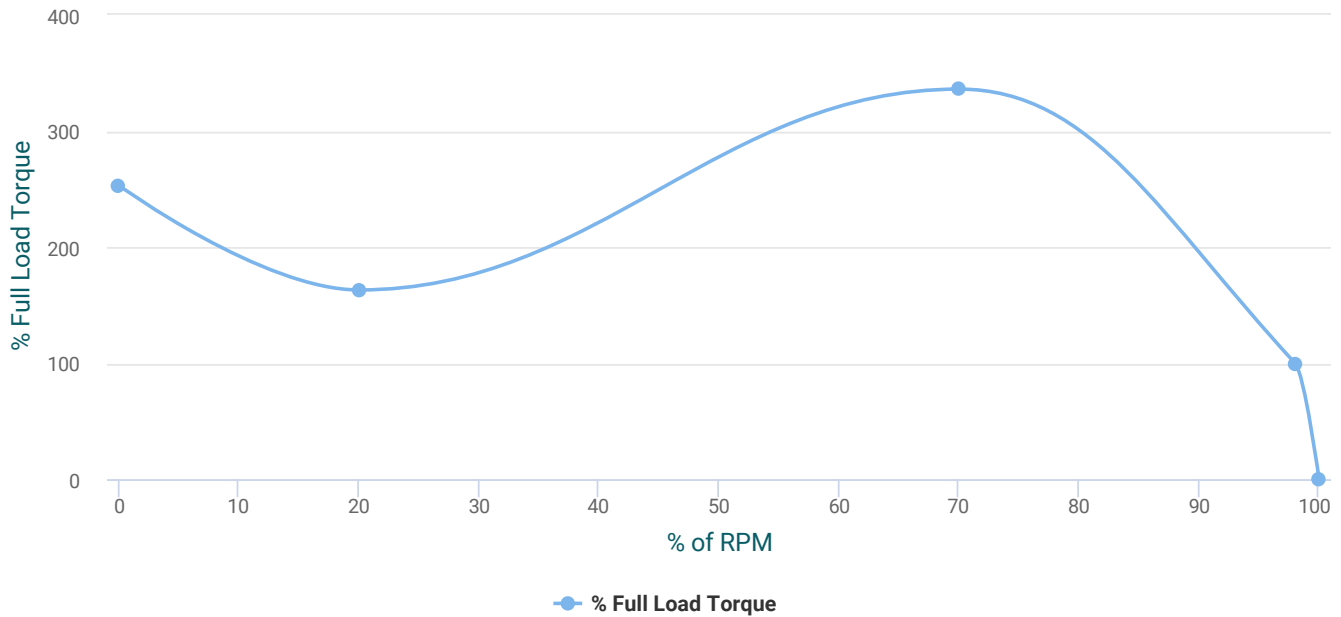

**PERFORMANCE LOAD VALUES, HIGH VOLTAGE, 60Hz**

**TYPICAL PERFORMANCE - NOT GUARANTEED VALUES**

TORQUE VALUES	TORQUE (lb-ft)	TORQUE (% FULL LOAD)	PERFORMANCE VALUES	
Locked Rotor Torque	33.925685106	253	Start Configuration	DOL
Pull-Up Torque	21.857259574	163	Starting Current (A)	33.3
Breakdown Torque	45.055455319	336	No-Load Current (A)	2.595
Full Load Torque	13.409361702	100	No-Load Power Factor	0.067

% OF RATED LOAD	25	50	75	100	125	S.F. 1.25
Line Amperes (A)	2.72	3.103	3.653	4.337	5.124	5.124
Efficiency (%)	-	86.7	88.9	89.4	89.1	89.1
Speed (r/min)	1195.2	1190.8	1185.9	1180.5	1174.8	1174.8
Power Factor (cosΦ)	0.321	0.513	0.638	0.712	0.756	0.756
Input Power (kW)	0.696	1.268	1.856	2.461	3.086	3.086

**Questions? Call 1.888.286.1820**