




**Model FDR0032BS-56HC-01**  
 MFG PN: SLF56H3Z2L-CAN

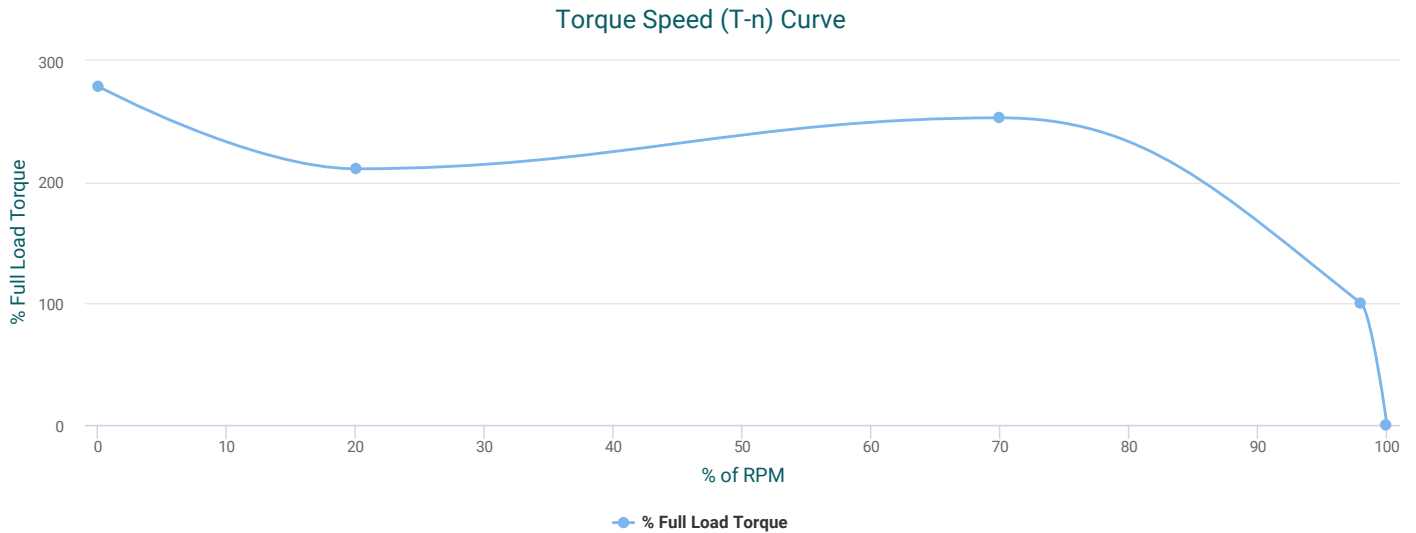

Highcharts.com

**PERFORMANCE LOAD VALUES, HIGH VOLTAGE, 60Hz**

**TYPICAL PERFORMANCE - NOT GUARANTEED VALUES**

TORQUE VALUES	TORQUE (lb-ft)	TORQUE (% FULL LOAD)	PERFORMANCE VALUES	
Locked Rotor Torque	12.5	279	Start Configuration	DOL
Pull-Up Torque	9.5	211	Starting Current (A)	92.54
Breakdown Torque	11.4	253	No-Load Current (A)	2.2
Full Load Torque	4.5	100	No-Load Power Factor	-

% OF RATED LOAD	25	50	75	100	125	S.F. 1.25
Line Amperes (A)	-	-	-	11.7	-	13.5
Efficiency (%)	-	-	-	82.4	-	82.1
Speed (r/min)	-	-	-	3504	-	3479
Power Factor (cosΦ)	-	-	-	1	-	-
Input Power (kW)	-	-	-	2.67	-	-

**Questions? Call 1.888.286.1820**