




**Model JPC0152DP**  
 MFG PN: TXC254T15U2B-A

**Torque Speed (T-n) Curve**

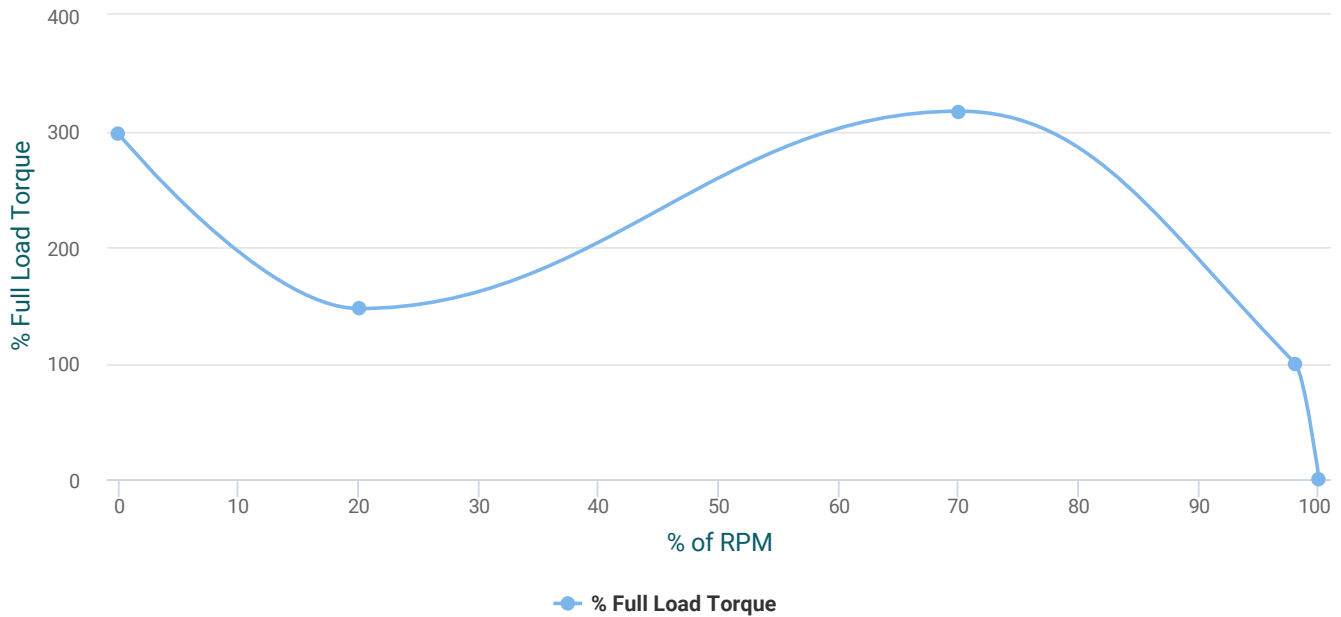

**PERFORMANCE LOAD VALUES, HIGH VOLTAGE, 60Hz**

**TYPICAL PERFORMANCE - NOT GUARANTEED VALUES**

TORQUE VALUES	TORQUE (lb-ft)	TORQUE (% FULL LOAD)	PERFORMANCE VALUES	
Locked Rotor Torque	75.039794336	297	Start Configuration	D0L
Pull-Up Torque	42.975312483	147	Starting Current (A)	151.2
Breakdown Torque	88.177325095	317	No-Load Current (A)	7.601
Full Load Torque	22.267001286	100	No-Load Power Factor	0.1

% OF RATED LOAD	25	50	75	100	125	S.F. 1.25
Line Amperes (A)	6.318	9.375	12.874	16.724	20.836	20.836
Efficiency (%)	-	88.608	90.452	90.812	90.52	90.52
Speed (r/min)	3590.8	3581	3570.6	3559.4	3547.5	3547.5
Power Factor (cosΦ)	0.668	0.83	0.889	0.909	0.915	0.915
Input Power (kW)	3.363	6.207	9.12	12.113	15.19	15.19

**Questions? Call 1.888.286.1820**