




Model JMC0156FP
 MFG PN: TXC284T15U6B-A-5

Torque Speed (T-n) Curve

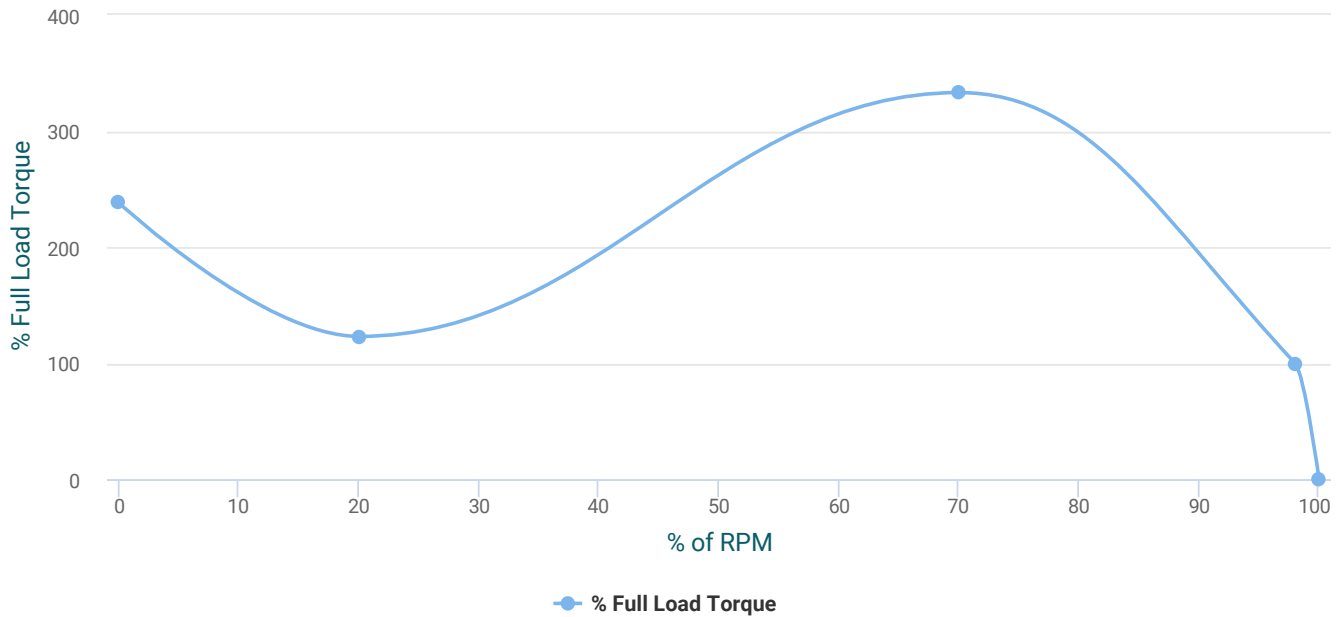

PERFORMANCE LOAD VALUES, HIGH VOLTAGE, 60Hz

TYPICAL PERFORMANCE - NOT GUARANTEED VALUES

TORQUE VALUES	TORQUE (lb-ft)	TORQUE (% FULL LOAD)	PERFORMANCE VALUES	
Locked Rotor Torque	220.17572519	238	Start Configuration	DOL
Pull-Up Torque	96.580149393	123	Starting Current (A)	136.4
Breakdown Torque	268.128107056	333	No-Load Current (A)	7.242
Full Load Torque	67.538566009	100	No-Load Power Factor	0.069

% OF RATED LOAD	25	50	75	100	125	S.F. 1.25
Line Amperes (A)	7.833	9.716	12.204	15.159	17.097	17.097
Efficiency (%)	-	89.795	91.189	91.28	91.044	91.044
Speed (r/min)	1196	1192	1187.8	1183.2	1180.3	1180.3
Power Factor (cosΦ)	0.427	0.644	0.757	0.812	0.83	0.83
Input Power (kW)	3.333	6.236	9.211	12.27	14.147	14.147

Questions? Call 1.888.286.1820